


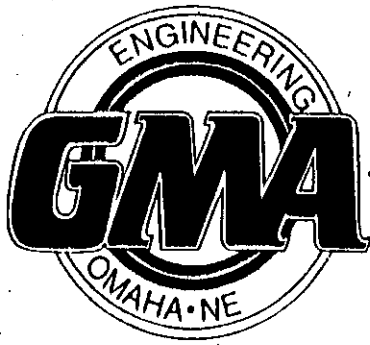

**INC.**

#### **WARRANTY EXCEPTION**

**DO NOT USE SEMI-METALLIC BRAKE PADS ON GMA ROTORS  
USE ONLY ORGANIC PADS SUCH AS SBS-RQ COMPOUND OR  
VESRAH-KEVLAR PADS. OTHER BRANDS OF ORGANIC PADS  
ARE ALSO ACCEPTABLE.**

---

**IT IS OUR RECOMMENDATION THAT YOU DO NOT POLISH OR CHROME  
PLATE GMA ROTORS AS THIS WILL VOID ANY WARRANTY.**

---

#### **BREAK IN PROCEDURE FOR GMA BRAKE ROTORS**

**USE LIGHT TO MEDIUM BRAKING PRESSURE UNTIL PADS WEAR COATING FROM THE  
SURFACE OF THE ROTOR. (APPROXIMATELY 100 TO 300 MILES)**

**REMOVE BRAKE PADS FROM CALIPER AND SAND ONLY THE BRAKE PAD SURFACE ON  
A FLAT SURFACE WITH 60-80 GRIT SAND PAPER.**

**RE-INSTALL YOUR PADS AND YOU'RE READY TO RIDE!**